

Pipe n' Go

by

PurePro

®

FEATURES

- Available in 40- and 80-gallon models.
- Factory installed piping with 3/4" sweat unions.
- Control, T&P and drain pre-installed.
- Reversible design for maximum flexibility.
- Maximized Heat-Transfer Technology – 8 times faster than cupronickel, 25 times faster than stainless steel.
- Maximized height/diameter spacing to create a chimney effect of thermal currents which scrubs more heat into the water faster.
- High output capabilities to handle larger demands.
- Available with Limited Lifetime or 6-year Transferable Warranty.



The **Pipe n' Go** by PurePro® combines fast installation with easy servicing. All piping and wiring connections are placed at an easy working height, while sweat unions make plumbing simple. A factory-installed T&P and dial aquastat are included with every unit. The tank uses a seamless plastic liner that will not crack, chip or peel. This polyethylene reservoir is surrounded by high-density urethane insulation and enclosed in a steel outer shell with a durable appliance-like finish. The **Pipe n' Go** by PurePro® even includes a pre-installed 1/4" turn drain. With this PurePro® indirect, you're ready for any installation; simply **Pipe n' Go**.

Removable Heat Exchanger


- High-performance in a durable package.
- Brass plate and cold water inlet pipe provide a strong connection and meet stringent safety codes.
- Threaded black iron pipe for the boiler supply and return withstand rough handling and require no back-up wrench.
- Low pressure drop – multiple coil passes allow the use of standard circulator. No large, expensive pump necessary.



Proudly
Manufactured in
the USA

Pipe n' Go

by **PurePro**®

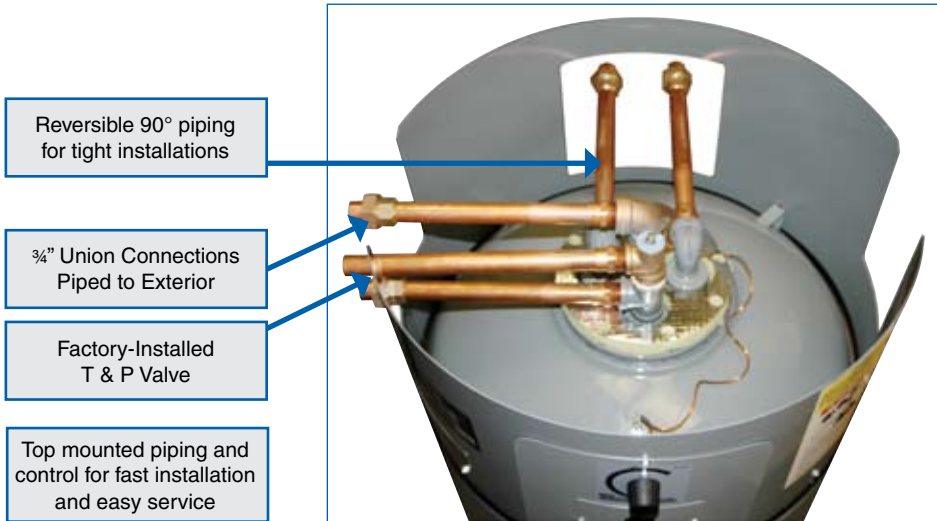


- Reversible 90° piping for tight installations
- 3/4" Union Connections Piped to Exterior
- Factory-Installed T & P Valve
- Top mounted piping and control for fast installation and easy service

PERFORMANCE		
BOILER OUTPUT	1 FIRST-HOUR RATING (90°F rise)	2 CONTINUOUS FLOW (70°F rise steady state)
BTU/HR	GPH	GPH
Model# TD41ZPGLP		
40,000	89	69
60,000	116	104
80,000	143	139
100,000	170	173
120,000	197	208
140,000	224	242
Model# TD80ZPGLP		
40,000	120	69
60,000	147	104
80,000	174	139
100,000	201	173
120,000	228	208
140,000	255	242

SPECIFICATIONS	
Model # TD41ZPGLP	
Capacity (Gallons):	41
Height (Inches):	48
Diameter (Inches):	22
Shipping Wgt./Lbs.	138
Cold Water Inlet:	3/4" sweat union
Hot Water Inlet:	3/4" sweat union
Boiler Supply:	3/4" sweat union
Boiler Return:	3/4" sweat union
Warranty:	6-Year Transferable*
Model # TD80ZPGLP	
Capacity (Gallons):	80
Height (Inches):	57
Diameter (Inches):	26
Shipping Wgt./Lbs.	190
Cold Water Inlet:	3/4" sweat union
Hot Water Inlet:	3/4" sweat union
Boiler Supply:	3/4" sweat union
Boiler Return:	3/4" sweat union
Warranty:	6-Year Transferable*

*6-year warranty is upgraded to Limited Lifetime by purchasing kit. See your F.W. Webb branch for details.

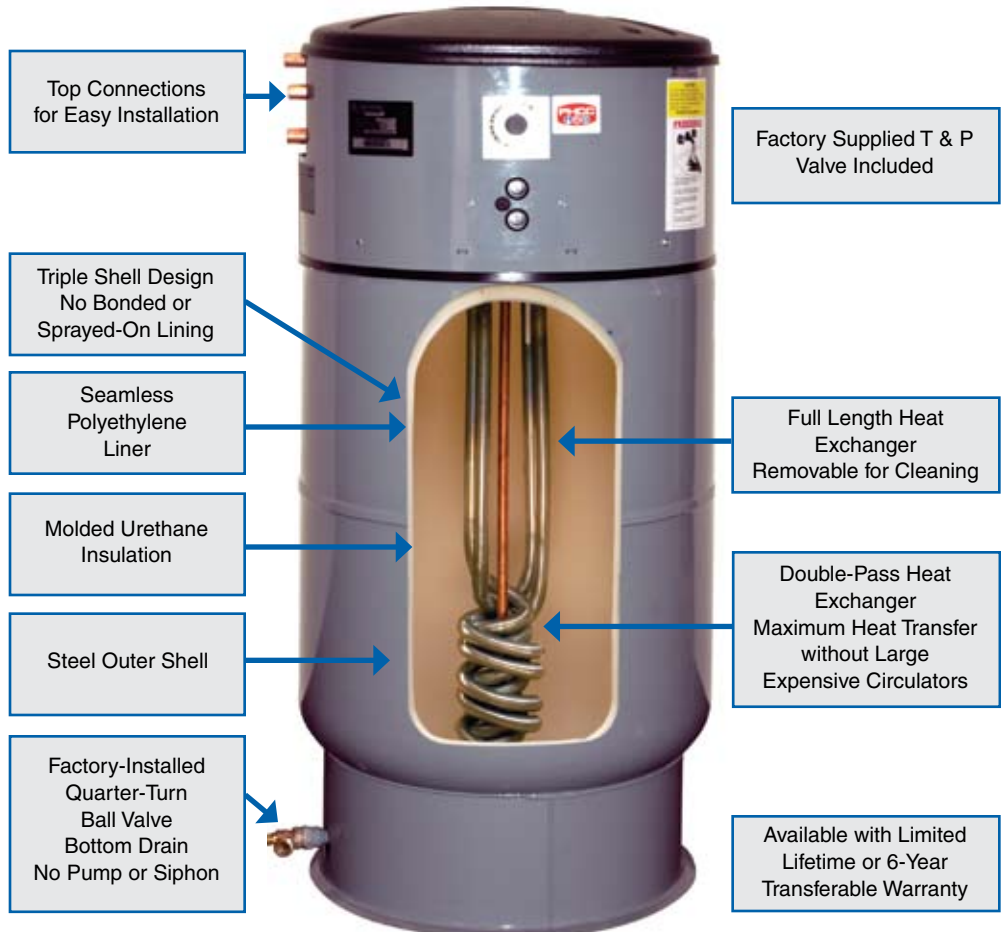

- Top Connections for Easy Installation
- Triple Shell Design No Bonded or Sprayed-On Lining
- Seamless Polyethylene Liner
- Molded Urethane Insulation
- Steel Outer Shell
- Factory-Installed Quarter-Turn Ball Valve Bottom Drain No Pump or Siphon
- Factory Supplied T & P Valve Included
- Full Length Heat Exchanger Removable for Cleaning
- Double-Pass Heat Exchanger Maximum Heat Transfer without Large Expensive Circulators
- Available with Limited Lifetime or 6-Year Transferable Warranty

www.pureproproducts.com