

# Plug n' Go

by **PurePro**®



The **Plug n' Go** by PurePro® is the most complete indirect water heater package available. It takes installation to a new level of simplicity with all accessories factory installed and ready to run. All piping and wiring connections are placed at an easy working height, while sweat unions make plumbing simple. A factory-installed T&P and dial aquastat are included with every unit. The tank uses a seamless plastic liner that will not crack, chip or peel. This polyethylene reservoir is surrounded by high-density urethane insulation and enclosed in a steel outer shell with a durable appliance-like finish. The **Plug n' Go** by PurePro® even includes a pre-installed ¼" turn drain. With this PurePro® indirect, you're ready for any installation, simply **Plug n' Go**.

## Removable Heat Exchanger

- High-performance in a durable package.
- Brass plate and cold water inlet pipe provide a strong connection and meet stringent safety codes.
- Threaded black iron pipe for the boiler supply and return withstand rough handling and require no back-up wrench.
- Low pressure drop – multiple coil passes allow the use of standard circulator. No large, expensive pump necessary.

## FEATURES

- Available in 40- and 80-gallon models.
- Includes Taco 007 circulator with built-in priority relay and flow check. Circulator pre-plumbed and wired to control.
- Includes 8ft. of metal-shielded 14-gauge conduit with wire nuts and connectors.
- Factory installed piping with ¾" sweat unions.
- Control, T&P and drain pre-installed.
- Reversible design for maximum flexibility.
- Maximized Heat-Transfer Technology – 8 times faster than cupronickel, 25 times faster than stainless steel.
- Maximized height/diameter spacing to create a chimney effect of thermal currents which scrubs more heat into the water faster.
- High output capabilities to handle larger demands.
- Available with Limited Lifetime or 6-year Transferable Warranty.




Proudly  
Manufactured in  
the USA

# Plug n' Go

by **PurePro**

All units include 8 ft. of pre-installed conduit with connectors and wire nuts.

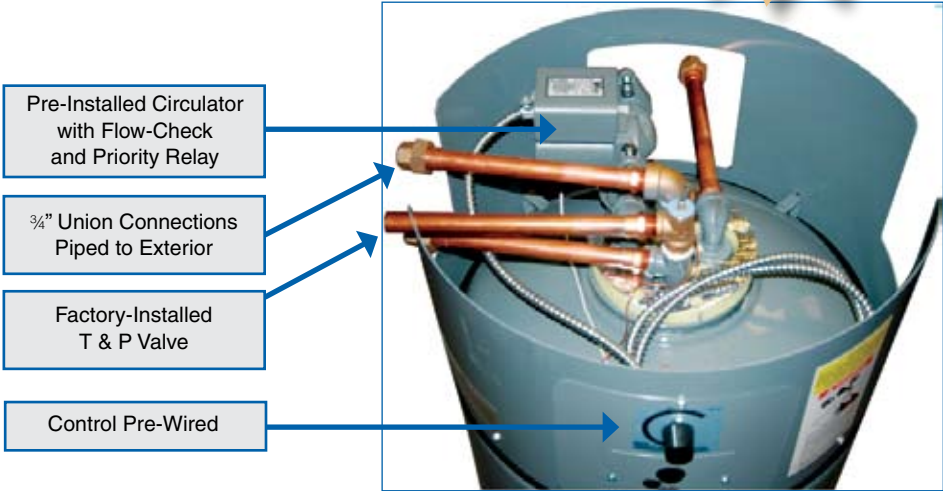


- Pre-Installed Circulator with Flow-Check and Priority Relay
- 3/4" Union Connections Piped to Exterior
- Factory-Installed T & P Valve
- Control Pre-Wired

| PERFORMANCE            |                                 |  |
|------------------------|---------------------------------|--|
| BOILER OUTPUT          | 1 FIRST-HOUR RATING (90°F rise) | 2 CONTINUOUS FLOW (70°F rise steady state) |
| BTU/HR                 | GPH                             | GPH  |
| <b>Model# PRO41ZPG</b> |                                 |  |
| 40,000                 | 89                              | 69   |
| 60,000                 | 116                             | 104  |
| 80,000                 | 143                             | 139  |
| 100,000                | 170                             | 173  |
| 120,000                | 197                             | 208  |
| 140,000                | 224                             | 242  |
| <b>Model# PRO80ZPG</b> |                                 |  |
| 40,000                 | 120                             | 69   |
| 60,000                 | 147                             | 104  |
| 80,000                 | 174                             | 139  |
| 100,000                | 201                             | 173  |
| 120,000                | 228                             | 208  |
| 140,000                | 255                             | 242  |

| SPECIFICATIONS          |                      |
|-------------------------|----------------------|
| <b>Model # PRO41ZPG</b> |                      |
| Capacity (Gallons):     | 41                   |
| Height (Inches):        | 51                   |
| Diameter (Inches):      | 22                   |
| Shipping Wgt./Lbs.      | 145                  |
| Cold Water Inlet:       | 3/4" sweat union     |
| Hot Water Inlet:        | 3/4" sweat union     |
| Boiler Supply:          | 3/4" sweat union     |
| Boiler Return:          | 3/4" sweat union     |
| Warranty:               | 6-Year Transferable* |
| <b>Model # PRO80ZPG</b> |                      |
| Capacity (Gallons):     | 80                   |
| Height (Inches):        | 57                   |
| Diameter (Inches):      | 26                   |
| Shipping Wgt./Lbs.      | 195                  |
| Cold Water Inlet:       | 3/4" sweat union     |
| Hot Water Inlet:        | 3/4" sweat union     |
| Boiler Supply:          | 3/4" sweat union     |
| Boiler Return:          | 3/4" sweat union     |
| Warranty:               | 6-Year Transferable* |

\*6-year warranty is upgraded to Limited Lifetime by purchasing kit. See your F.W. Webb branch for details.

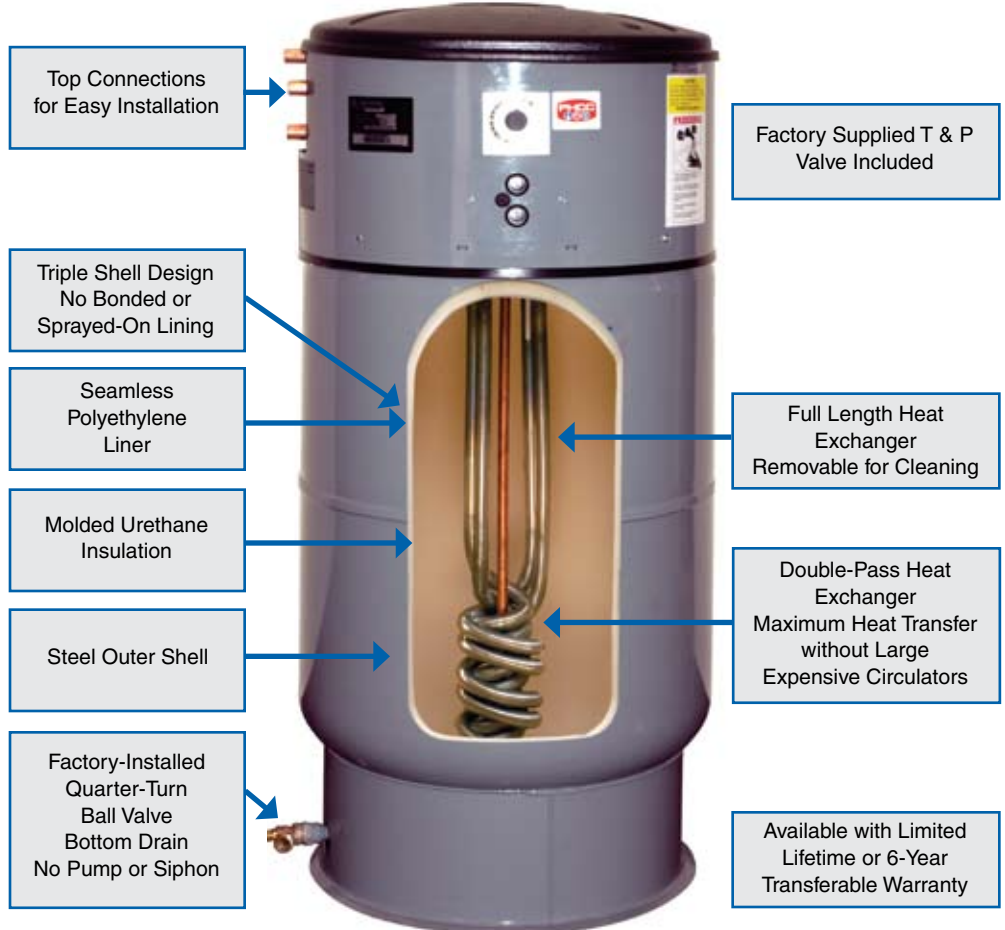

- Top Connections for Easy Installation
- Triple Shell Design No Bonded or Sprayed-On Lining
- Seamless Polyethylene Liner
- Molded Urethane Insulation
- Steel Outer Shell
- Factory-Installed Quarter-Turn Ball Valve Bottom Drain No Pump or Siphon
- Factory Supplied T & P Valve Included
- Full Length Heat Exchanger Removable for Cleaning
- Double-Pass Heat Exchanger Maximum Heat Transfer without Large Expensive Circulators
- Available with Limited Lifetime or 6-Year Transferable Warranty

[www.pureproproducts.com](http://www.pureproproducts.com)